

Battery Powered Hydraulic Tools









USAR

BC-300 Combi-Tool

Extrication

Forced Entry

Police

Remote Rescue

ORC Bar Cutters

Military

HRS Modular System

Ogura & Vimpex

Why Ogura?

Ogura was the first manufacturer in the world to develop a full range of truly portable, lightweight and powerful battery-powered hydraulic cutting, spreading and lifting tools. These tools are in use worldwide by rescue, military, police and security services.



Established in 1928 as a manufacturer of industrial products, Ogura has a long history of developing extremely reliable and hard working hydraulic tools for the construction, fabrication and metal working industry. In 1999 Ogura applied their knowledge of industrial hydraulics to the rescue and emergency services market to produce the first generation HRS Modular System. The range has now matured into an extensive series of tools.



Established for 18 years - Vimpex is a specialist supplier of fire fighting and rescue equipment as well as accessories and associated products to the emergency services (EMS), police, fire, USAR and military markets.

We are sole European distributor for the Ogura range of battery-powered hydraulic cutting, spreading and forced entry equipment and the Robopak battery backup system.

Vimpex staff are trained in the demonstration, service and repair of all tools and equipment we sell. We are the European warranty repair and service agent for all Ogura rescue and industrial tools.

We are active members of several trade bodies including FIRESA, ADS and the FIA. Our management systems, sales activities and service and repair operations are all accredited to ISO9001:2002.



Quality System Certificate No. 456 Assessed to ISO 9001:2000

















www.rescue-tools.co.uk

Introduction

Ogura Hydraulics

Ogura are world experts in compact hydraulics.

All Ogura tools use their patented pump design and operate at between 400 and 440 bar, which, whilst allowing for a compact pump body, gives incredible working power.







Service and **Support**

Vimpex staff are fully trained in Japan by Ogura engineers which allows for excellent customer service and quick response for repairs and service. A full inventory of spare parts is held in stock so wherever you are in Europe, we are able to supply spares within 48 hours.



Applications

Ogura tools are tough, powerful and portable tools for cutting, spreading, lifting and opening. The tools are ruggedised for military and security services operations and are extremely versatile. Applications include:

- Forced Entry (MOE)
- Vehicle & Confined Space Extrication
- Urban Search and Rescue
- Vehicle Self-Rescue

- Remote Decommissioning
- Protestor Release
- Aerial Response
- Rapid Response RTC Vehicles



Li-Ion Battery Technology

All Ogura tools use the amazing Makita 18 V Li-Ion battery.



Recent tests by Ogura prove that the new Li-lon units suffer a discharge rate of only 9% after 500 days in storage. Ogura are the only manufacturer of rescue tools with access to Makita batteries. Tests prove that the batteries used on Ogura tools have at least twice the life of other power tool batteries. Intelligent charging means that each individual battery has its own charge profile

dependent on use. This extends battery life, increases durability and means 30% more cuts per charge. Recharge time is only 22 minutes. Both in-vehicle and mains-powered chargers are available.



Customers



Storage, Carrying & Vehicle Solutions

Customers can specify moulded inserts for tool cases or vehicle trays. Moulded trays ensure tools, accessories and valuable batteries are returned to their correct location. Vehicle trays can also accommodate in-vehicle chargers so batteries are always fully charged and ready for use.

For a complete first response rescue package, consider combining Ogura Hydraulics with Makita battery-powered tools, all incorporated into a compact tray insert.





HRS Modular Rescue System

The Ogura HRS battery-powered Hydraulic Rescue System is a portable, lightweight, compact and extremely versatile series of cutting, spreading and forced entry tools.



Totally modular in nature, the HRS system allows users to select only those tools suited to their tasks, thereby allowing professionals the freedom to purpose-build their battery-powered rescue system.



With the HRS system, simplicity is the key and due to the nature of its 'closed' hydraulic system, maintenance and training requirements are minimal.

The HRS Pump has been recently upgraded to incorporate a larger oil reservoir meaning we are now able to offer a 200 mm / 8" door opening tool.







All Ogura tools are supplied in sturdy plastic cases.

Features

- Dedicated tools offer flexibility and ease of use
- Revolutionary hydraulic pump gives incredible power
- Connection either via hoses or directly to the pump
- Immediate deployment
- Single trigger grip allows extremely easy operation
- Very low maintenance
- New larger pump allows for 200 mm door opener





HRS System Components



HRS-941 Hydraulic Pump



Central to the HRS system's power is the battery powered pump that uses the amazing 18 V 3.0 Ah Li-lon battery. The pump produces an impressive 400 bar and features an instantaneous coupling for swift and clean tool changes.



Tools can either be directly coupled or, for even more versatility, a flexible hose (up to 3 metres) can be used to connect the tools. The pump unit is supplied with an $18\,V\,3.0\,Ah\,Li$ -lon battery, $240\,V\,ac\,charger\,and\,I\,m$ hose connector. In-vehicle $12/24\,V\,dc$ and $1\,I\,0\,V\,ac\,charger\,are\,also$ available.

Weight	4.2 kg (including a battery, 0.6 kg)	
Dimensions (L x W x H)	328x111x273 mm	
Internal pressure (Max.)	39.7 - 40.2 Mpa	
Oil quantity (ISO viscosity No. 32)	177 cc	





HRS-922 6 Tonne Metal



Max. cutting force	5.8 tonnes	
Max. cutter opening	72 mm	
Weight	3.8 kg	
Dimensions (L x W x H)	290x140x81 mm	
Weight (connected to pump)	7.3 kg	
Dimensions (connected to pump)	573x111x292 mm	
Cutting Capacity:		
Round Bar-440 N/mm ² (64,000 psi)*	8 mm	
Flat bar-400 N/mm ² (58,000 psi)*	70 x t3 mm	
Flat pipe-290 N/mm² (42,000 psi)*	40 x t2 mm	









Max. cutting force	10.0 tonnes
Max. cutter opening	100 mm
Weight	6.2 kg
Dimensions (L x W x H)	382x186x104 mm
Weight (connected to pump)	10.1 kg
Dimensions (connected to pump)	664x111x273 mm
Cutting Capability:	
Rebar-440 N/mm² (64,000 psi)*	10 mm
Round bar-440 N/mm ² (58,000 psi)*	10 mm
Flat bar-400 N/mm² (58,000 psi)*	80 x t3 mm
Round tube-290 N/mm ² (42,000 psi)*	40 x t2 mm

^{*} Tensile strength







Max. cutting force	8.0 tonnes		
Max. cutter opening	26 mm		
Weight	5.5 kg		
Dimensions (L x W x H)	328x130x104 mm		
Weight (connected to pump)	10.1 kg		
Dimensions (connected to pump)	664x111x273 mm		
Cutting Capacity:			
Rebar-440 N/mm ² (90,000 psi)*	16 mm		
Round bar-400 N/mm ² (58,000 psi)*	16 mm		
Round tube-400 N/mm ² (58,000 psi)*	25 x t3.2 mm		
Square tube-400 N/mm ² (58,000 psi)*	25 x 25 x t3.2 mm		

^{*} Tensile strength





Max. cutting force	7.2 tonnes
Weight	5.2 kg
Dimensions (L x W x H)	228x105x84 mm
Cutting Capacity:	
Rebar-440 N/mm² (64,000 psi)*	16 mm
Flat bar-400 N/mm ² (58,000 psi)*	38 x t6 mm
Flat pipe-290 N/mm ² (58,000 psi)*	14 x 14 mm
	-

Bar stabilisation bolt for true control

* Tensile strength



Spreading force (at tips)	4.0 tonnes
Opening distance	158 mm
Weight	5.4 kg
Dimensions (L x W x H)	352x121x78 mm
Weight (connected to pump)	9.3 kg
Dimensions (connected to pump)	634x111x279 mm





HRS-935/945 Door Opener/Jack

Method of Entry (MOE) and other tactical users requiring tools for breaching and door opening operations can choose between two specialist Ogura tools. HRS-935 is a very compact tool with 4 tonnes of power. HRS-945 has a larger 200 mm opening and 3.5 tonnes of lifting force. Both tools are ideal for door opening and breaching operations. When in the closed position both tools have very thin, but very tough, 3 mm blades. A strike plate on each of the tools allows users to force the tools into tight gaps in doors and panels. The bigger HRS-945 has a handy rubberised handle to aid carrying and tool positioning.










BC-300 Combi Tool

The BC-300 Combi-Tool is absolutely unique for the following reasons:

- 1. It is the lightest in its class.
- 2. It is the only one using Makita Li-lon batteries and offering in-vehicle charging'
- 3. It is the only tool to use removable, field-replaceable blade inserts.

At only 14.2 kg, this is the lightest battery-powered Combi-Tool around. As Ogura is the only rescue tool manufacturer with access to Makita batteries, the BC-300 can boast the most advanced power source available with in-vehicle charging options. Able to cut 24 mm bar with a spreading distance of 300 mm at over 5 tonnes, this battery-powered Combi-Tool will not let you down.

Very narrow in profile, the BC-300 can be held close to the body whilst in use which maximises control and user safety.

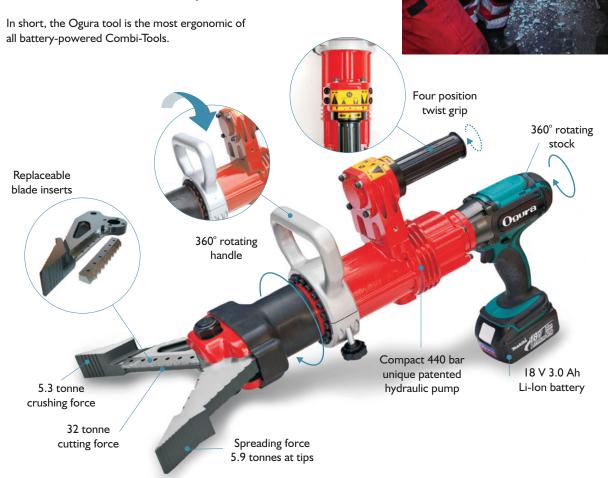

Features

- Low cost removable blade chips significantly reduce cost of ownership
- Field-replaceable blade inserts
- Lightweight and compact; offers real portability
- Revolutionary hydraulic pump gives incredible power
- No trailing hoses to trip over
- Immediate deployment
- 300 mm 5.9 tonne spread
- 32 tonne cutting pressure


Performs to EN13204 BK30/300-E-14.2!



BC-300 Performance

EN13204 - Double acting hydraulic rescue tools for fire and rescue service use

This standard, although not universally accepted by all tool manufacturers, does give a useful guide to a tool's cutting capability. The Ogura Combi-Tool's classification is:





Cutting Capability

The BC-300's unique replaceable blade chips have amazing cutting power and have been proven to be ultra-durable.

Cutting Capability According to EN13204:

Hot Rolled Round Bar: 24 mm
Flat Bar: 80 x 10 mm
Round Tube: 60.3 x t2.9 mm
Square Hollow Tube: 50 x t4 mm
Rectangular Hollow Tube: 60 x 40 x t3 mm

■ Rebar: 22 mm*

Angle: 45 x 45 x t6 mm*

* Non-EN-13204 materials

Specification

A Max. cutting opening: 205 mm


B Cutting force in the notch: 32 tonnes (313.8 kN)

C Max. cutting force at the centre: 11.8 tonnes (115.7 kN)

D Max. Spreading distance: 300 mm

E Spreading Force at tips: 5.2 tonnes (51 kN)
F Spreading Force 25 mm from tips: 5.9 tonnes (57.9 kN)





A tool can only claim conformity to EN I 3204 if each of the 5 materials above are able to be cut 15 times with one blade with no damage (total 75 cuts). The Ogura tools with their extremely durable blades of course far exceed this requirement.

MCT-250 Manual Combi-Tool

Immediately deployed, hand operated combi-tool for confined space, remote rescue and hazardous area operations.

Features


- Double handle for easy operation
- Unique replaceable blade chips
- Completely self-contained
- Shares many features with BC-300
- Lightweight and very portable




ORC Portable Bar Cutters

For rescue teams requiring a dedicated bar cutter to ease the extrication of casualties from buildings affected by collapse by earthquake, explosion or collision, the two ORC bar cutting tools offer unrivalled performance and power. These tools have extreme run times - over 100 cuts on one battery charge.

The ORC-16 is capable of shearing through 16 mm rebar, whilst the ORC-19 makes easy work of 20 mm bar. With very quick cutting speeds and safe use, the ORC tools are also ideal for forced entry into buildings, removal of illegally parked bicycles and motorbikes and for protestor release during political demonstrations. Mains powered versions are available, which will cut up to 32 mm rebar.

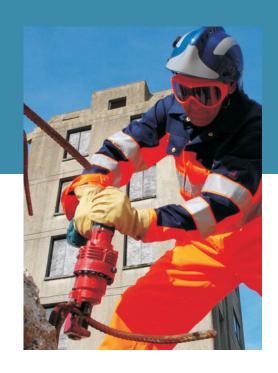

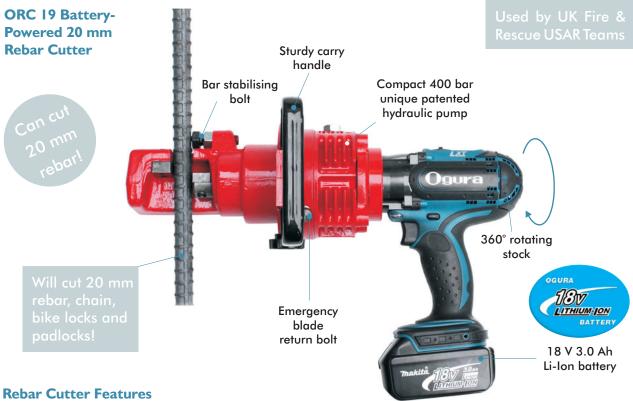

- Battery-powered able to cut 20 mm rebar
- Mains-powered able to cut 32 mm rebar
- Ideal for Protestor Release can cut through D-Locks
- Very quick in operation
- Cuts bike locks, high tensile steel and steel cable
- Very durable specially heat treated blades



Ogura Accessories

A full range of accessories are available to support Ogura Hydraulic Tools, including batteries, chargers and blades:

Blades & Accessories

Description	Part No.	Description	Part No.
HRS-922 shear blade	5100190	BC-300 blade holder	5100320
HRS-932 shear blade	5101300	BC-300 blade chips	5100310
HRS-932(s) blade holder	5101310	Chain Pulling Attachment with chains for BC-300/MCT-250 BC	C-300/CHAINS
HRS-932(s) blade chip	5101320	HBC-225 blade set	9002040
ORC-16HPW blade set	9002420	HBC-232 blade set	9002460
ORC-19 blade set	9002030		

Batteries and Chargers

Description	Part No.		Description	Part No.
18 V 3.0 Ah Li-Ion Battery LI-Ion Charger (UK) LI-Ion Charger (EU) LI-Ion Charger (110 V) (UK)	BL1830 DC18RA/240UK DC18RA/240EU	Trakte.	RoboPak with 18 V Makita Adaptor and UK Charger (four times the run time of a standard battery)	ROBO/UK/MAK18V
Li-Ion Charger 12/24 V (In-vehicle)	DC18SE	-183		Kunn

Robopak - Variable Voltage Battery Packs

Are you tired of running out of power at critical times?

Frustrated with constantly purchasing different types of power tool batteries?

Would you like a single battery system that can run all of your batterypowered tools and lights with more reliability and greater run time?

Robopak

The answer is the Robopak Variable Voltage Battery Pack. Lightweight and easy to transport, Robopaks are heavyduty, all-weather battery systems that provide reliable DC power.

With multiple voltage and multiple amperage capabilities, a single Robopak can power infinite brands of tools, lights and equipment. Robopak units suffer from no memory problems and can be left on trickle-charge if needs be.





Robolight - LED Scene Lighting

The next generation of scene lighting. Eliminate the high cost of lamp or ballast replacements!

Extremely bright and efficient - These 12 V LED scene lighting systems are portable and can be used in all weather conditions. They are easily stored in your vehicle to provide light where and when you need it.

Our LEDs utilise the latest solid-state electronics that is extremely durable and are encased in an all-weather heavy-duty rugged aluminium housing. The portable telescoping tripod is made of anodized aluminium.

Two power versions are available; 5,000 or 10,000 lumens. The tripod can extend to approximately 2.6 m in height (also available in a shorter 1.7 m height version).

This LED Scene Light can either be powered externally or by our variable voltage Robopak battery system, allowing scene lighting in the most remote locations. Use of the Robopak also provides great flexibility as the system can be used to power all sorts of power tools as well as the Robopak LED Spot Lights.





Vimpex Limited

Star Lane, Great Wakering Essex SS3 0PJ England Tel: +44 (0) 1702 216999 Fax:+44 (0) 1702 216699 E-mail:sales@vimpex.co.uk

www.rescue-tools.co.uk

DS/OGU/ISS 5

